

Product Literature

Characteristics

Orange - The universal symbol for Caution - and ideal for EMS, police and fire, haz mat functions, spills, etc. This medium weight nitrile glove is extremely elastic and comfortable while providing the tensile strength required for these demanding procedures. Polymer interior for rapid donning. Textured finish for an excellent grip even in the presence of moisture. Color: CAUTION Orange.



Exam Glove Non-Sterile



Nitrile Series 199





PRODUCT DETAILS

SIZE	ITEM NO.	PACKAGING	DESCRIPTION	
XS	199050	100 Gloves/box, 10 boxes/case		
S	199100	100 Gloves/box, 10 boxes/case		
М	199200	100 Gloves/box, 10 boxes/case	Gloves, Exam, Nitrile, Non-Sterile,	
L	199300	100 Gloves/box, 10 boxes/case	Powder-Free, Textured	
XL	199350	100 Gloves/box, 10 boxes/case		
XXL	199400	90 Gloves/box, 10 boxes/case		

Features

- NFPA & UL Certified
- Low Modulus
- Non-Latex
- Textured Finish
- Caution Orange Color

Benefits


- Quality Assurance
- Softer, More Comfortable Fit
- No Risk of Latex Allergens
- Improved Wet/Dry Grip
- More Easily Seen at Night

Product Solutions You Trust



Specification Sheet

NitriDerm® Ultra Orange™

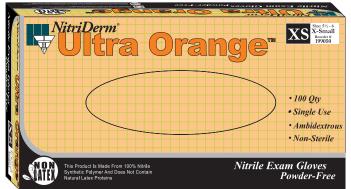

Nitrile Exam Gloves Powder-Free



NitriDerm Ultra Orange is manufactured in compliance with the following international standards

Designation	□ Standard		
ASTM D6319-00a(2005)□	Standard Specification for Nitrile Examination Gloves for Medical Application		
ASTM D5151-06	Standard Test Method for Detection of Holes in Medical Gloves		
ASTM F1671-03	Standard Test Method for Resistance of Materials Used in Protective Clothing to Penetration by Blood-Borne Pathogens		

Sizes XS-XL 100 Gloves/Box, 10 Boxes/Case Sizes XXL 90 Gloves/Box, 10 Boxes/Case

Size	Item Number	Palm Width +/- 3mm	Total Length +/- 5mm	Thickness Finger mil	Thickness Finger mm
X-SMALL	199050	76	240	4	0.10
SMALL	199100	86	240	4	0.10
MEDIUM	199200	98	240	4	0.10
LARGE	199300	107	240	4	0.10
X-LARGE	199350	115	240	4	0.10
XX-LARGE	199400	125	240	4	0.10

Tensile Strength & Elongation	Before Aging	After Accelerated Aging	
Tensile Strength Min. (Mpa)	14	14	
ASTM Requirement Min. (Mpa)	14	14	
Elongation Minimum Min. (%)	500	400	
ASTM Requirement Min. (%)	500	400	







Product Solutions You Trust
1-800-272-1533

NNOVATIVE